



**REGGIANA
RIDUTTORI**



**HELICAL GEAR UNITS
FOR LIFTING**



CONTENTS

| | page |
|--|-------|
| GENERAL INFORMATION | 3 |
| DESIGNATION, SYMBOLS AND UNIT OF MEASUREMENT | 4 |
| SELECTING THE GEAR UNIT | 5 |
| NOMINAL POWER RATING | 8 |
| OUTPUT TORQUE | 9 |
| DIMENSIONS | 10-11 |
| SHAFT ENDING | 12 |
| SPLINED LOW-SPEED SHAFT AND BROACHED FLANGE | 13 |
| SHAFT ARRANGEMENT, MOUNTING POSITION | 14 |
| ACTUAL RATIOS | 15 |
| MOTORIZED GEAR UNITS | 16-17 |
| OVERHUNG LOADS | 18-19 |
| MASS MOMENTS OF INERTIA | 20 |
| LUBRICATION | 21 |
| SELECTION FORM | 22 |
| STATE OF SUPPLY | 23-24 |

GENERAL INFORMATION

This series of helical gear units has been expressly designed for application in the lifting field, distinguished by intermittent operation.

The different mechanical and dimensional characteristics have been studied to better adapt to the specific requirements of this field of application.

To select the gear units, the service factor is determined according to the FEM and ISO standards relating to lifting mechanisms, on the basis of the type of operation, the load condition and the requested duration. Mechanical efficiency η for each size of this series of gear units is 97%.

GEARS AND SHAFTS

The gears are cylindrical, with helical profile ground after heat treatment. They are made of casehardened and tempered steel 20MnCr5, 16NiCr4, 18CrMo4 UNI EN 10084.

All the gears have been designed according to ISO 6336 and DIN 3990 standards and have been checked according to the AGMA 2001 standard.

The cylindrical low-speed shafts are made of hardened and tempered steel type 42CrMo4 UNI EN 10083-1 while the hollow low-speed shafts are made of Fe510 UNI EN 10025. The high-speed shafts are made of casehardened and tempered steel, or hardened and tempered steel.

The standard version shafts are cylindrical with key according to UNI 6604-69. In this case, the fitting of the output coupling on the low-speed shaft must be made with interference. The low-speed shafts can also be made with splined ends for fitting by means of broached flange, while for special applications, a version also exists with hollow low-speed shaft with key seat. The high-speed shafts have been designed with elongated end to allow fitting a brake between motor and gear unit.

BEARINGS

The bearings are top quality and sized on the basis of the duration envisaged by the selected use class.

GEAR CASING

The casings of the gear units are made of grey cast-iron EN-GJL-250 UNI EN 1561 up to size 93, while larger sizes are made of electrically-welded and distended steel. On request, these can however be made of electrically-welded and distended steel for all sizes.

All the casings are made in two parts to make gear unit fitting and maintenance easier.

Furthermore, the steel casings feature a further inspection cover.

The configuration of the cast-iron casing allows fitting the gear unit in either horizontal or vertical position.

DESIGNATION

| | | | | | | | | | |
|---|---|----|----|----|----|---|---|---|--|
| P | C | 33 | SB | FB | 16 | B | S | 2 | |
| | | | | | | | | | Mounting position 1, 2, 3 (page 14) |
| | | | | | | | | | High-speed shaft |
| | | | | | | | | | S solid |
| | | | | | | | | | PAM hollow + motor flange |
| | | | | | | | | | BC solid + motor flange + elastic coupling |
| | | | | | | | | | Shaft arrangement |
| | | | | | | | | | A, B, C, D, E, F, G, H, I, L, M, N (page 14) |
| | | | | | | | | | Transmission ratio i_N |
| | | | | | | | | | Broached flange |
| | | | | | | | | | Low-speed shaft |
| | | | | | | | | | S solid with key |
| | | | | | | | | | SB solid splined |
| | | | | | | | | | C hollow with key seat |
| | | | | | | | | | UB hollow with shrink disc |
| | | | | | | | | | Size |
| | | | | | | | | | No. of stages |
| | | | | | | | | | C triple reduction |
| | | | | | | | | | Type |
| | | | | | | | | | P helical unit |

SYMBOLS AND UNIT OF MEASUREMENT

| SYMBOL | PARAMETER | UNIT OF MEASUREMENT |
|----------|---|---------------------|
| f_s | Mechanical service factor | |
| f_N | Nominal performance corrective factor | |
| f_a | Ambient correction factor | |
| i_N | Nominal transmission ratio | |
| i_r | Actual transmission ratio | |
| n_1 | High speed | rpm |
| n_2 | Low speed | rpm |
| P_N | Nominal power | kW |
| P | Absorbed motor power | kW |
| η | Efficiency | |
| T | Torque | Nm |
| T_N | Nominal torque | Nm |
| t | Temperature | °Celsius |
| P_t | Thermal capacity | kW |
| P_{tN} | Nominal thermal capacity | kW |
| F_{r1} | High-speed shaft overhung load | N |
| F_{r2} | Low-speed shaft overhung load | N |
| J_1 | High-speed shaft mass moment of inertia | kgm^2 |

SELECTING THE GEAR UNIT

Table 1 shows the various load states and useful durations for determining the service factor to be adopted to select the gear unit. The service factor stems from the combination of a series of conditions related to duration, overloads, start-up frequencies, type of motorisation, speed and reliability, in accordance with the conditions relating to the classes of lifting mechanisms indicated in the FEM 1.001/III and ISO 4301/1 standards.

| Tab. 1 | fs |  | IRREGULAR USE | IRREGULAR USE | IRREGULAR USE | IRREGULAR USE | REGULAR USE | REGULAR USE | REGULAR USE | INTENSIVE USE | INTENSIVE USE | INTENSIVE USE |
|--------------------------------------|-----------------------------|---|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|-----------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| <i>Duration (2)</i> | | | T0 | T1 | T2 | T3 | T4 | T5 | T6 | T7 | T8 | T9 |
| | | | ≤ 200 h | > 200 h ≤ 400 h | > 400 h ≤ 800 h | > 800 h ≤ 1600 h | > 1600 h ≤ 3200 h | > 3200 h ≤ 6300 h | > 6300 h ≤ 12500 h | > 12500 h ≤ 25000 h | > 25000 h ≤ 50000 h | > 50000 h ≤ 100000 h |
| <i>Load type (1)</i> | | | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ | ↓ |
| <i>L 1</i> <i>Light</i> | <i>fs ≥ class</i> | | 0,8 M 1 | 0,8 M 1 | 0,8 M 1 | 0,8 M 2 | 0,8 M 3 | 0,8 M 4 | 0,8 M 5 | 0,9 M 6 | 1,1 M 7 | 1,3 M 8 |
| km ≤ 0,125 k ≤ 0,5 | Start/hr Service kz ≥ | (1 Dm) 90 15% 0,83 | (1 Dm) 90 15% 0,83 | (1 Dm) 90 15% 0,83 | (1 Cm) 120 20% 0,83 | (1 Bm) 150 25% 0,83 | (1 Am) 180 30% 0,83 | (2 m) 240 40% 0,83 | (3 m) 300 50% 0,83 | (4 m) 360 60% 0,74 | (5 m) 420 60% 0,60 | (5 m) ≥ 360 60% 0,51 |
| <i>L 2</i> <i>Moderate</i> | <i>fs ≥ class</i> | | 0,8 M 1 | 0,8 M 1 | 0,8 M 2 | 0,8 M 3 | 0,8 M 4 | 0,8 M 5 | 0,9 M 6 | 1,1 M 7 | 1,3 M 8 | 1,5 M 8 |
| 0,125 < km ≤ 0,125 0,5 < k ≤ 0,63 | Start/hr Service kz ≥ | (1 Dm) 90 15% 0,83 | (1 Dm) 90 15% 0,83 | (1 Cm) 120 20% 0,83 | (1 Bm) 150 25% 0,83 | (1 Am) 180 30% 0,83 | (2 m) 240 40% 0,83 | (3 m) 300 50% 0,83 | (4 m) 360 60% 0,74 | (5 m) 420 60% 0,60 | (5 m) ≥ 360 60% 0,51 | (5 m) ≥ 360 60% 0,44 |
| <i>L 3</i> <i>Heavy</i> | <i>fs ≥ class</i> | | 0,8 M 1 | 0,8 M 2 | 0,8 M 3 | 0,9 M 4 | 0,9 M 5 | 1 M 6 | 1,2 M 7 | 1,4 M 8 | 1,8 (4) M 8 | 2,2 (4) M 8 |
| 0,25 < km ≤ 0,5 0,63 < k ≤ 0,8 | Start/hr Service kz ≥ | (1 Dm) 90 15% 0,83 | (1 Cm) 120 20% 0,83 | (1 Bm) 150 25% 0,83 | (1 Am) 180 30% 0,74 | (2 m) 240 40% 0,74 | (3 m) 300 50% 0,67 | (4 m) 360 60% 0,56 | (5 m) 420 60% 0,48 | (5 m) ≥ 360 60% 0,44 | (5 m) ≥ 360 60% 0,37 | (5 m) ≥ 360 60% 0,33 |
| <i>L 4</i> <i>Very heavy</i> | <i>fs ≥ class</i> | | 0,8 M 2 | 0,8 M 3 | 0,9 M 4 | 0,9 M 5 | 1 M 6 | 1,2 M 7 | 1,4 M 8 | 1,8 (4) M 8 | 2,2 (4) M 8 | 2,5 (4) M 8 |
| 0,5 < km ≤ 1 0,8 < k ≤ 1 | Start/hr Service kz ≥ | (1 Cm) 120 20% 0,83 | (1 Bm) 150 25% 0,83 | (1 Am) 180 30% 0,74 | (2 m) 240 40% 0,74 | (3 m) 300 50% 0,67 | (4 m) 360 60% 0,56 | (5 m) 420 60% 0,48 | (5 m) ≥ 360 60% 0,44 | (5 m) ≥ 360 60% 0,37 | (5 m) ≥ 360 60% 0,33 | (5 m) ≥ 360 60% 0,33 |

$$(1) \quad k = (km)^{1/3} = \left[\sum_{i=1 \dots n} ((P_i/P_{max})^3 \times (t_i/T)) \right]^{1/3}$$

k : average equivalent spectrum factor

km : spectrum factor

ti : average duration of each load level

T : total use duration

Pi : amplitude of each load level

Pmax : amplitude of maximum load level

L1 : mechanisms usually subject to low loads and rarely to maximum load

L2 : mechanisms usually subject to moderate loads and rarely to maximum load

L3 : mechanisms normally subject to heavy loads and frequently to maximum load

L4 : mechanisms regularly subject to maximum load.

- (2) The durations are purely theoretical, they cannot be guaranteed and can be obtained from daily average use, from the number of working days and from the expected years of operation.
- (3) The indicated fs service factors are only valid for lifting equipment and take into account the maximum indicated number of starts and a max torque on the gear unit during T2 max start and braking intervals, limited by the kz peak factor.
- (4) In the case in which Fr2 ≤ (Fr2 max/2) it can be considered: for L3-T8, L4-T7 fs ≥ 1,5; for L3-T9, L4-T8 fs ≥ 1,8; for L4-T9 fs ≥ 2.

In the case of speeds different to those indicated in the catalogue, Table 2 shows the nominal performance corrective factors which take into account the input speeds > 1500 rpm

Table 2: Factor f_n

| n_1 (min ⁻¹) | 8 < i_n < 80 | | $i_n \geq 80$ | |
|----------------------------|----------------|----------------|----------------|----------------|
| | T _n | P _n | T _n | P _n |
| 1500 | 1,00 | 1,00 | 1,00 | 1,00 |
| 1750 | 0,97 | 1,25 | 1,00 | 1,28 |
| 2000 | 0,94 | 1,38 | 1,00 | 1,47 |
| 2400 | 0,92 | 1,62 | 1,00 | 1,76 |
| 2750 | 0,90 | 1,82 | 1,00 | 2,02 |

Besides on the basis of its mechanical performance, the selection of the gear unit must also be verified on the basis of its thermal characteristics. Table 3 shows the nominal thermal capacity relating to the condition of no auxiliary cooling, at a room temperature of 20°C.

Table 3: Nominal thermal capacity

| Size | 13 | 23 | 33 | 43 | 53 | 63 | 73 | 83 | 93 | 103 |
|---------------|----|----|----|----|----|-----|-----|-----|-----|-----|
| P_{tN} [kW] | 31 | 41 | 53 | 67 | 84 | 104 | 130 | 169 | 209 | 253 |

For different room temperatures, the nominal thermal capacity P_{tN} must be multiplied by the ambient correction factor f_a shown in Table 4.

Table 4: Ambient correction factor f_a

| Room temperature | f_a |
|------------------|-------|
| 10 °C | 1,14 |
| 20 °C | 1 |
| 30 °C | 0,86 |
| 40 °C | 0,72 |
| 50 °C | 0,56 |

$$P_t = P_{tN} \times f_a$$


Checking the thermal capacity is not normally necessary if the period of continuous operation is less than 3 hours and is followed by a period of inactivity long enough to restore room temperature in the gear unit.

OUTPUT TORQUE T_{N2} (Nm)

Sizes

| i_N | 13 | 23 | 33 | 43 | 53 | 63 | 73 | 83 | 93 | 103 |
|-------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|
| 8 | 4100 | 6100 | 8300 | 10900 | 15900 | 24900 | 31600 | 43900 | 62800 | 87000 |
| 9 | 4400 | 6300 | 8800 | 11500 | 16800 | 24900 | 33300 | 46400 | 66000 | 90000 |
| 10 | 4500 | 6600 | 9100 | 11900 | 17500 | 24900 | 34900 | 48500 | 70000 | 94000 |
| 11,2 | 4500 | 6600 | 9200 | 12500 | 18100 | 25100 | 36200 | 50800 | 72500 | 101000 |
| 12,5 | 4600 | 6600 | 9300 | 12700 | 18300 | 25300 | 36500 | 52100 | 75700 | 104000 |
| 14 | 4600 | 6600 | 9300 | 12800 | 18300 | 25300 | 36700 | 52500 | 76000 | 105000 |
| 16 | 4600 | 6700 | 9400 | 12800 | 18500 | 25700 | 36800 | 52800 | 76800 | 105000 |
| 18 | 4700 | 6700 | 9500 | 12900 | 18700 | 25700 | 37000 | 53600 | 77400 | 106000 |
| 20 | 4800 | 7100 | 9900 | 13600 | 20200 | 27600 | 38400 | 56600 | 77700 | 107000 |
| 22,5 | 4700 | 7000 | 9800 | 13400 | 20000 | 27100 | 37900 | 55900 | 76600 | 108000 |
| 25 | 4850 | 7200 | 10050 | 13700 | 20400 | 28100 | 39000 | 57500 | 78800 | 108000 |
| 28 | 4850 | 7200 | 10050 | 13700 | 20400 | 28100 | 39000 | 57500 | 78800 | 108000 |
| 31,5 | 4850 | 7200 | 10050 | 13700 | 20400 | 28100 | 39000 | 57500 | 78800 | 109000 |
| 35,5 | 4950 | 7350 | 10250 | 13900 | 20800 | 28500 | 39500 | 58500 | 80300 | 110000 |
| 40 | 4950 | 7350 | 10250 | 13900 | 20800 | 28500 | 39500 | 58500 | 80300 | 110000 |
| 45 | 4950 | 7350 | 10250 | 13900 | 20800 | 28500 | 39500 | 58500 | 80300 | 111000 |
| 50 | 5000 | 7450 | 10400 | 14200 | 21000 | 28900 | 40200 | 59300 | 81400 | 111000 |
| 56 | 5000 | 7450 | 10400 | 14200 | 21000 | 28900 | 40200 | 59300 | 81400 | 112000 |
| 63 | 5000 | 7450 | 10400 | 14200 | 21000 | 28900 | 40200 | 59300 | 81400 | 113000 |
| 71 | 5000 | 7450 | 10400 | 14200 | 21000 | 28900 | 40200 | 59300 | 81400 | 114000 |
| 80 | 5000 | 7450 | 10400 | 14200 | 21000 | 28900 | 40200 | 59300 | 81400 | 114000 |
| 90 | 5000 | 7450 | 10400 | 14200 | 21000 | 28900 | 40200 | 59300 | 81400 | 114500 |
| 100 | 5000 | 7450 | 10400 | 14200 | 21000 | 28900 | 40200 | 59300 | 81400 | 115000 |
| 112 | 5000 | 7450 | 10400 | 14200 | 21000 | 28900 | 40200 | 59300 | 81400 | 116200 |
| 125 | 5000 | 7450 | 10400 | 14200 | 21000 | 28900 | 40200 | 59300 | 81400 | 116200 |
| 140 | 5000 | 7450 | 10400 | 14200 | 21000 | 28900 | 40200 | 59300 | 81400 | 116200 |

DIMENSIONS

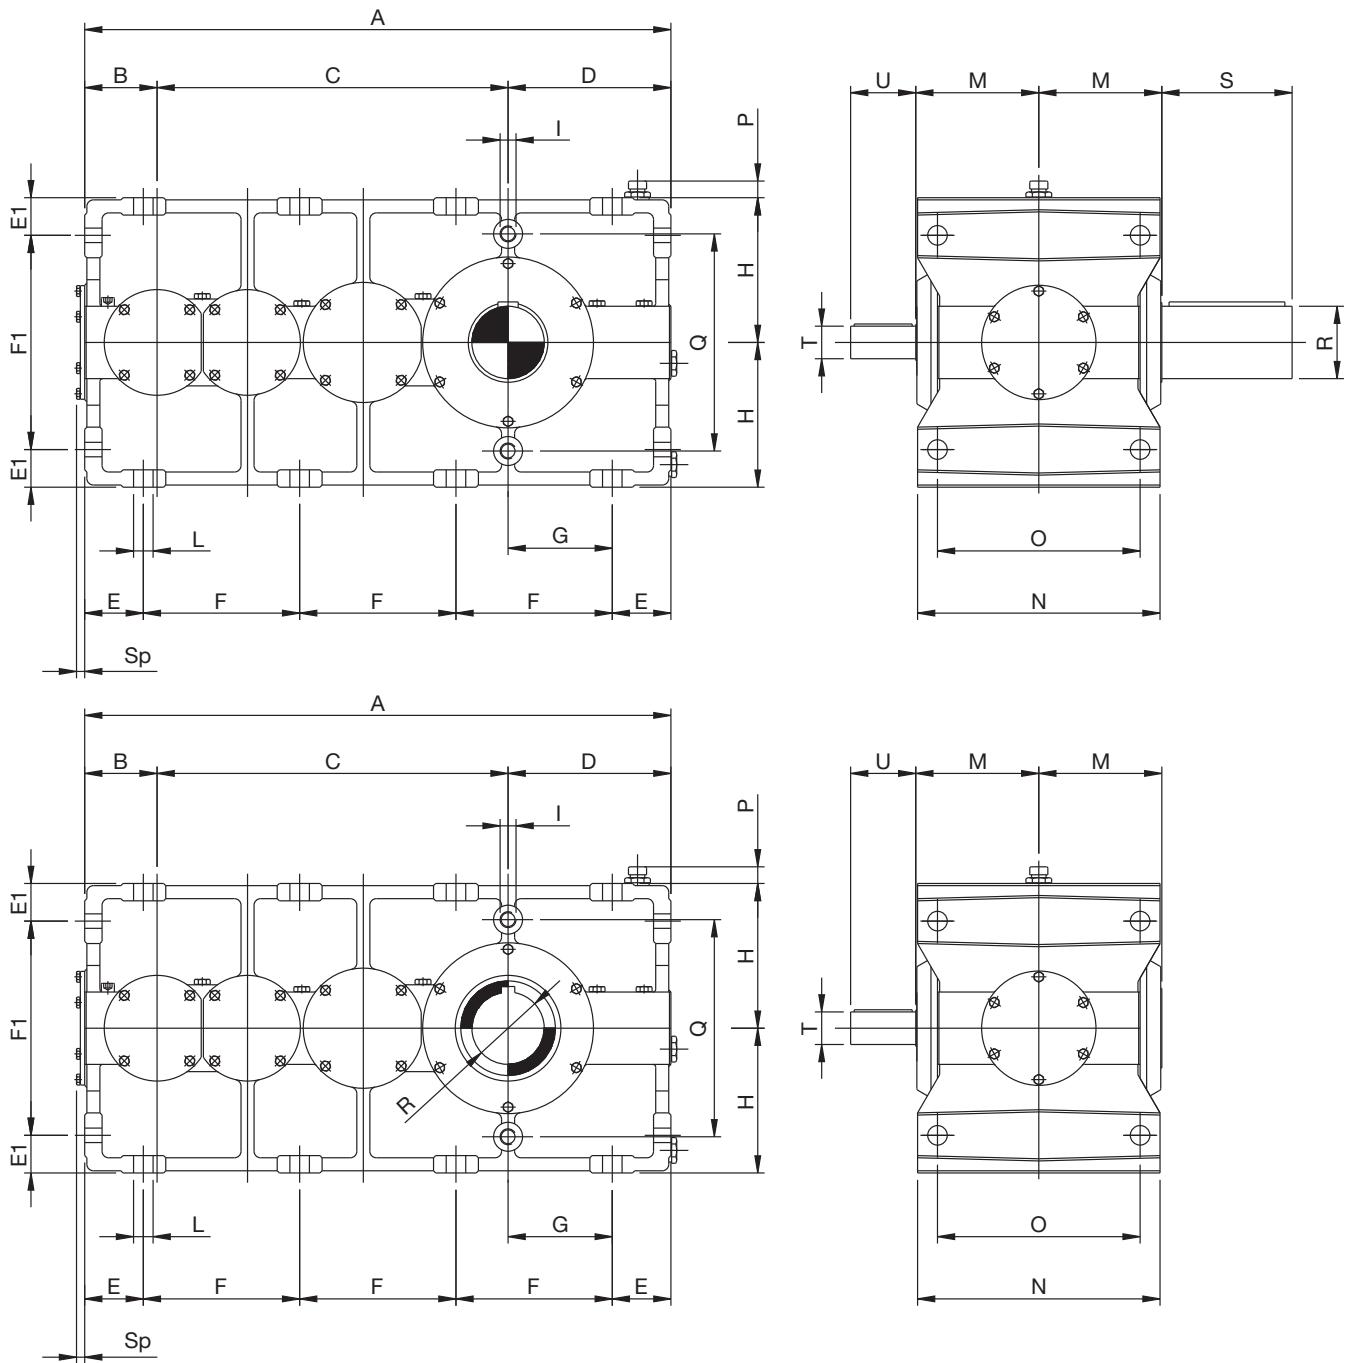


Approximate dimensions

| Size | A | B | C | D | E | E1 | F | F1 | G | H | I | L | M | N | O | P | Q | R | S | T | U | Sp | Oil quantity (l) | | | |
|-----------|------|-----|-----|-----|-------|----|-----|-----|-------|-----|-----|----|-----|-----|-----|----|-----|-----|-----|----|-----|----|------------------|-----|-----|-----|
| | | | | | | | | | | | | | | | | | | | | | | | 1* | 2* | 3* | |
| 13 | 572 | 70 | 342 | 160 | 56,5 | 38 | 153 | 204 | 103,5 | 140 | M16 | 20 | 121 | 237 | 200 | 20 | 210 | 65 | 110 | 35 | 90 | 11 | 127 | 5,5 | 11 | 9,2 |
| 23 | 645 | 80 | 385 | 180 | 63 | 42 | 173 | 236 | 117 | 160 | M18 | 22 | 137 | 269 | 225 | 22 | 240 | 80 | 140 | 40 | 100 | 11 | 184 | 7,6 | 15 | 13 |
| 33 | 722 | 90 | 432 | 200 | 70 | 46 | 194 | 268 | 130 | 180 | M20 | 25 | 151 | 297 | 250 | 22 | 270 | 90 | 160 | 45 | 115 | 12 | 250 | 11 | 22 | 18 |
| 43 | 810 | 100 | 485 | 225 | 81 | 52 | 216 | 296 | 144 | 200 | M22 | 27 | 170 | 335 | 280 | 22 | 300 | 100 | 180 | 50 | 130 | 13 | 350 | 15 | 32 | 26 |
| 53 | 907 | 112 | 545 | 250 | 90,5 | 57 | 242 | 336 | 159,5 | 225 | M24 | 30 | 192 | 379 | 315 | 22 | 340 | 110 | 200 | 55 | 140 | 16 | 490 | 21 | 44 | 36 |
| 63 | 1015 | 125 | 610 | 280 | 101 | 62 | 271 | 376 | 179 | 250 | M27 | 33 | 216 | 427 | 355 | 22 | 380 | 120 | 210 | 60 | 150 | 17 | 695 | 29 | 62 | 50 |
| 73 | 1140 | 140 | 685 | 315 | 112,5 | 72 | 305 | 416 | 202,5 | 280 | M30 | 36 | 242 | 479 | 400 | 25 | 430 | 140 | 250 | 65 | 165 | 18 | 959 | 41 | 87 | 71 |
| 83 | 1285 | 160 | 770 | 355 | 125 | 80 | 345 | 470 | 230 | 315 | M33 | 39 | 273 | 541 | 450 | 25 | 490 | 160 | 280 | 70 | 180 | 22 | 1343 | 58 | 125 | 102 |
| 93 | 1445 | 180 | 865 | 400 | 140,5 | 87 | 388 | 536 | 259,5 | 355 | M36 | 42 | 302 | 599 | 500 | 25 | 560 | 170 | 300 | 75 | 190 | 25 | 1880 | 81 | 175 | 144 |

* Mounting position page 14


DIMENSIONS

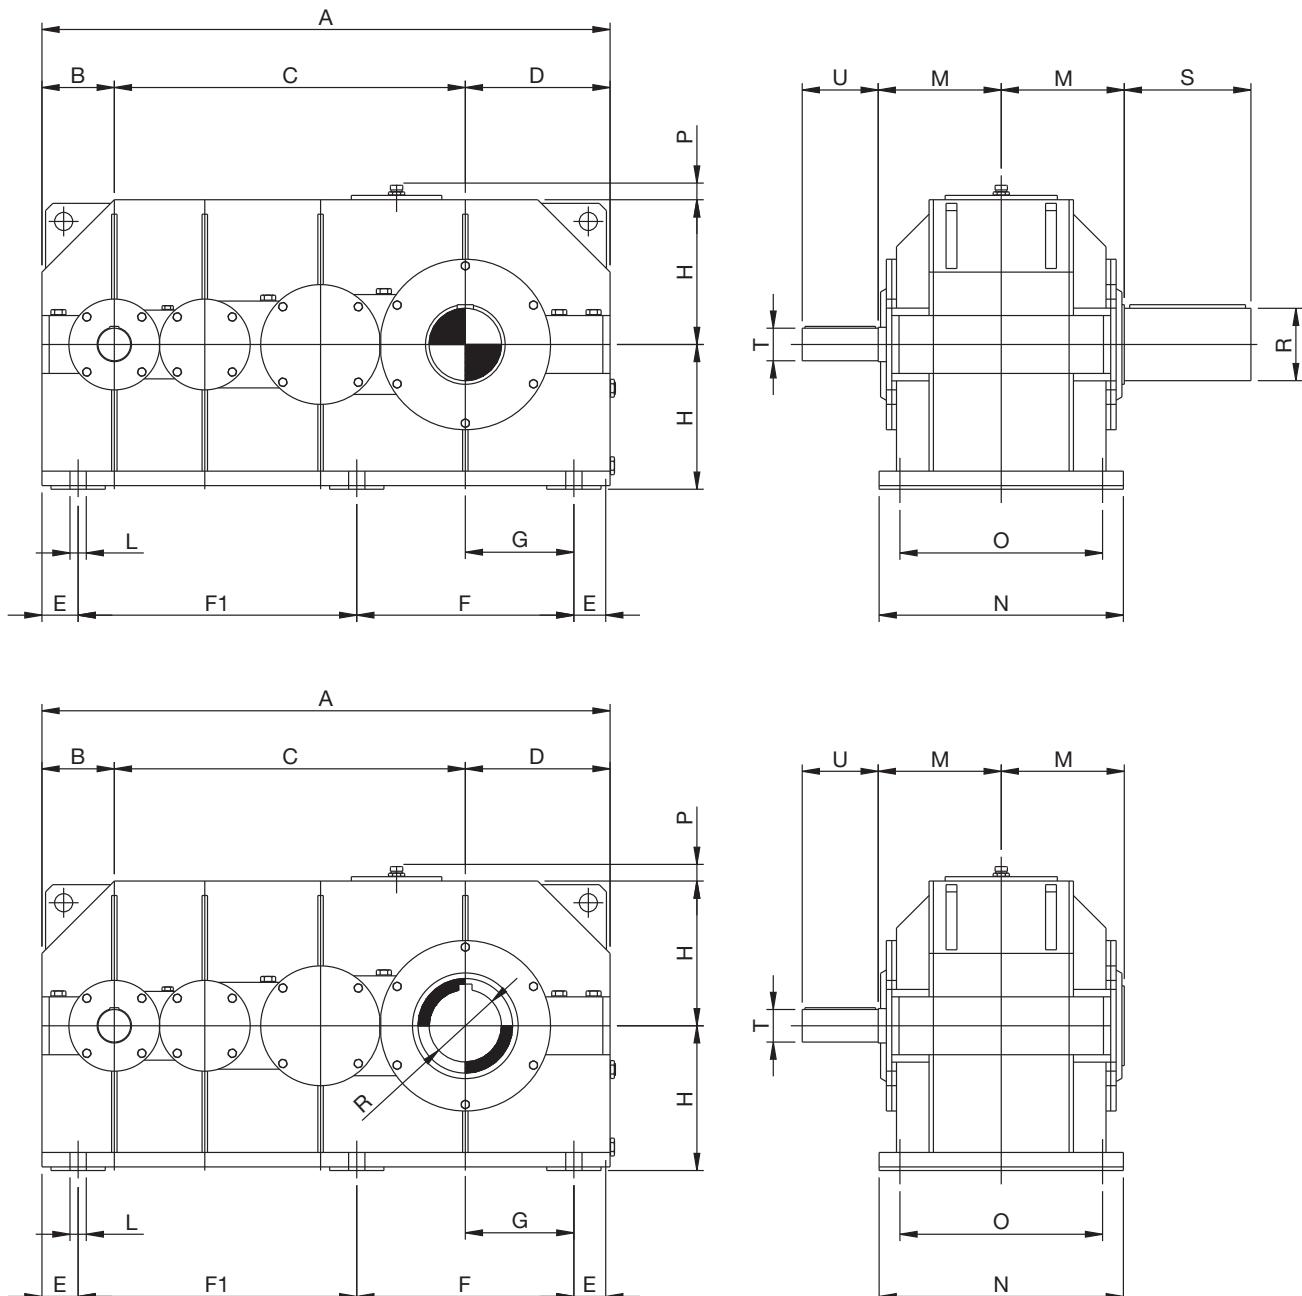

Approximate dimensions

| Size | A | B | C | D | E | F | F1 | G | H | L | M | N | O | P | R | S | T | U | Weight (kg) | Oil quantity (l) |
|------------|------|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|----|-----|-----|----|-----|-------------|------------------|
| 103 | 1570 | 200 | 970 | 400 | 100 | 600 | 770 | 300 | 400 | 45 | 340 | 675 | 560 | 60 | 200 | 350 | 90 | 180 | 2560 | 116 |


SHAFT ENDING

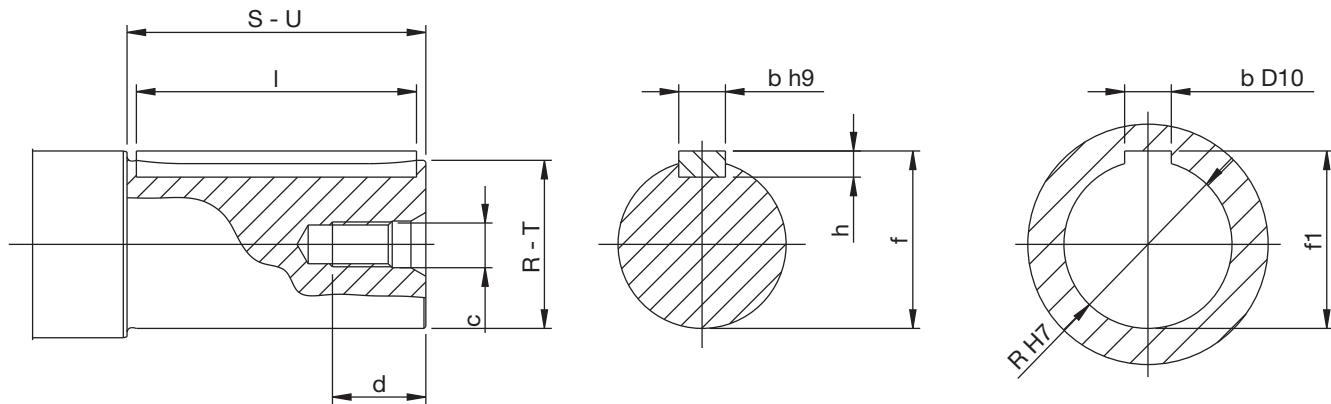

| R-T | S-U a11 | c | d | Key | | | f | f1 |
|--------|------------|-----|----|-----|----|-----|------|-------|
| | | | | b | h | I | | |
| 28 k6 | 63 | M8 | 19 | 8 | 7 | 56 | 31 | 31,3 |
| 35 k6 | 90 | M10 | 22 | 10 | 8 | 80 | 38 | 38,3 |
| 40 k6 | 100 | M10 | 22 | 12 | 8 | 90 | 43 | 43,3 |
| 45 k6 | 115 | M10 | 22 | 14 | 9 | 100 | 48,5 | 48,8 |
| 50 k6 | 130 | M12 | 28 | 14 | 9 | 110 | 53,5 | 53,8 |
| 55 m6 | 140 | M12 | 28 | 16 | 10 | 125 | 59 | 59,3 |
| 60 m6 | 150 | M12 | 28 | 18 | 11 | 140 | 64 | 64,4 |
| 65 m6 | 110 | M16 | 36 | 18 | 11 | 100 | 69 | 69,4 |
| 65 m6 | 165 | M16 | 36 | 18 | 11 | 140 | 69 | 69,4 |
| 70 m6 | 180 | M16 | 36 | 20 | 12 | 160 | 74,5 | 74,9 |
| 75 m6 | 190 | M16 | 36 | 20 | 12 | 180 | 79,5 | 79,9 |
| 80 m6 | 140 | M16 | 36 | 22 | 14 | 125 | 85 | 85,4 |
| 90 m6 | 160 | M16 | 36 | 25 | 14 | 140 | 95 | 95,4 |
| 90 m6 | 180 | M16 | 36 | 25 | 14 | 160 | 95 | 95,4 |
| 100 m6 | 180 | M20 | 42 | 28 | 16 | 160 | 106 | 106,4 |
| 110 m6 | 200 | M20 | 42 | 28 | 16 | 180 | 116 | 116,4 |
| 120 m6 | 210 | M20 | 42 | 32 | 18 | 180 | 127 | 127,4 |
| 140 m6 | 250 | M24 | 50 | 36 | 20 | 220 | 148 | 148,4 |
| 160 m6 | 280 | M24 | 50 | 40 | 22 | 250 | 169 | 169,4 |
| 170 m6 | 300 | M24 | 50 | 40 | 22 | 280 | 179 | 179,4 |
| 200 m6 | 350 | M30 | 64 | 45 | 25 | 320 | 210 | 210,4 |

Tapped holes on top according to DIN 332
 Keys according to UNI 6604-69

SPLINED LOW-SPEED SHAFT AND BROACHED FLANGE

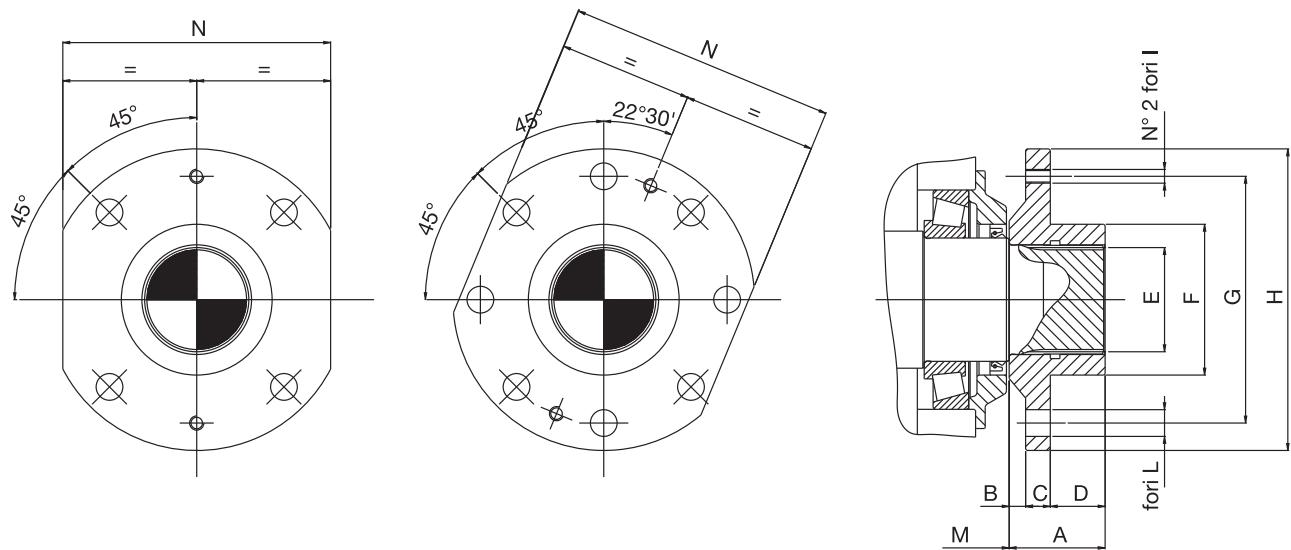


| Size | A | B | C | D | E | F_{f8} | G | H | I | L | M | N_{h9} |
|-------------|----------|----------|----------|----------|--------------------------|-----------------------|----------|----------|----------|---------------|----------|-----------------------|
| 13 | 70 | 11 | 16 | 43 | 70x64 ¹ | 100 | 160 | 200 | M 10 | N° 4 x Ø 17,5 | 121 | 180 |
| 23 | 70 | 12 | 18 | 40 | 80x74 ¹ | 110 | 180 | 220 | M 10 | N° 4 x Ø 19,5 | 137 | 200 |
| 33 | 75 | 15 | 20 | 40 | 95x89 ¹ | 130 | 190 | 240 | M 10 | N° 8 x Ø 19,5 | 151 | 220 |
| 43 | 80 | 20 | 20 | 40 | 105x3x30x34 ² | 145 | 200 | 250 | M 12 | N° 8 x Ø 21,5 | 170 | 230 |
| 53 | 95 | 20 | 23 | 52 | 110x3x30x35 ² | 150 | 225 | 280 | M 12 | N° 8 x Ø 21,5 | 192 | 250 |
| 63 | 125 | 20 | 25 | 80 | 130x5x30x24 ² | 180 | 280 | 355 | M 14 | N° 8 x Ø 23,5 | 216 | 315 |
| 73 | 140 | 22 | 28 | 90 | 140x5x30x26 ² | 200 | 315 | 400 | M 14 | N° 8 x Ø 23,5 | 242 | 355 |
| 83 | 160 | 25 | 32 | 103 | 160x5x30x30 ² | 225 | 355 | 450 | M 16 | N° 8 x Ø 29 | 273 | 400 |
| 93 | 180 | 28 | 34 | 118 | 180x8x30x21 ² | 250 | 400 | 500 | M 16 | N° 8 x Ø 32 | 302 | 450 |
| 103 | 200 | 32 | 36 | 132 | 200x8x30x24 ² | 280 | 450 | 560 | M 18 | N° 8 x Ø 35 | 340 | 500 |


1) Profile splined according to DIN 5482

2) Profile splined according to DIN 5480

SHAFT ARRANGEMENT

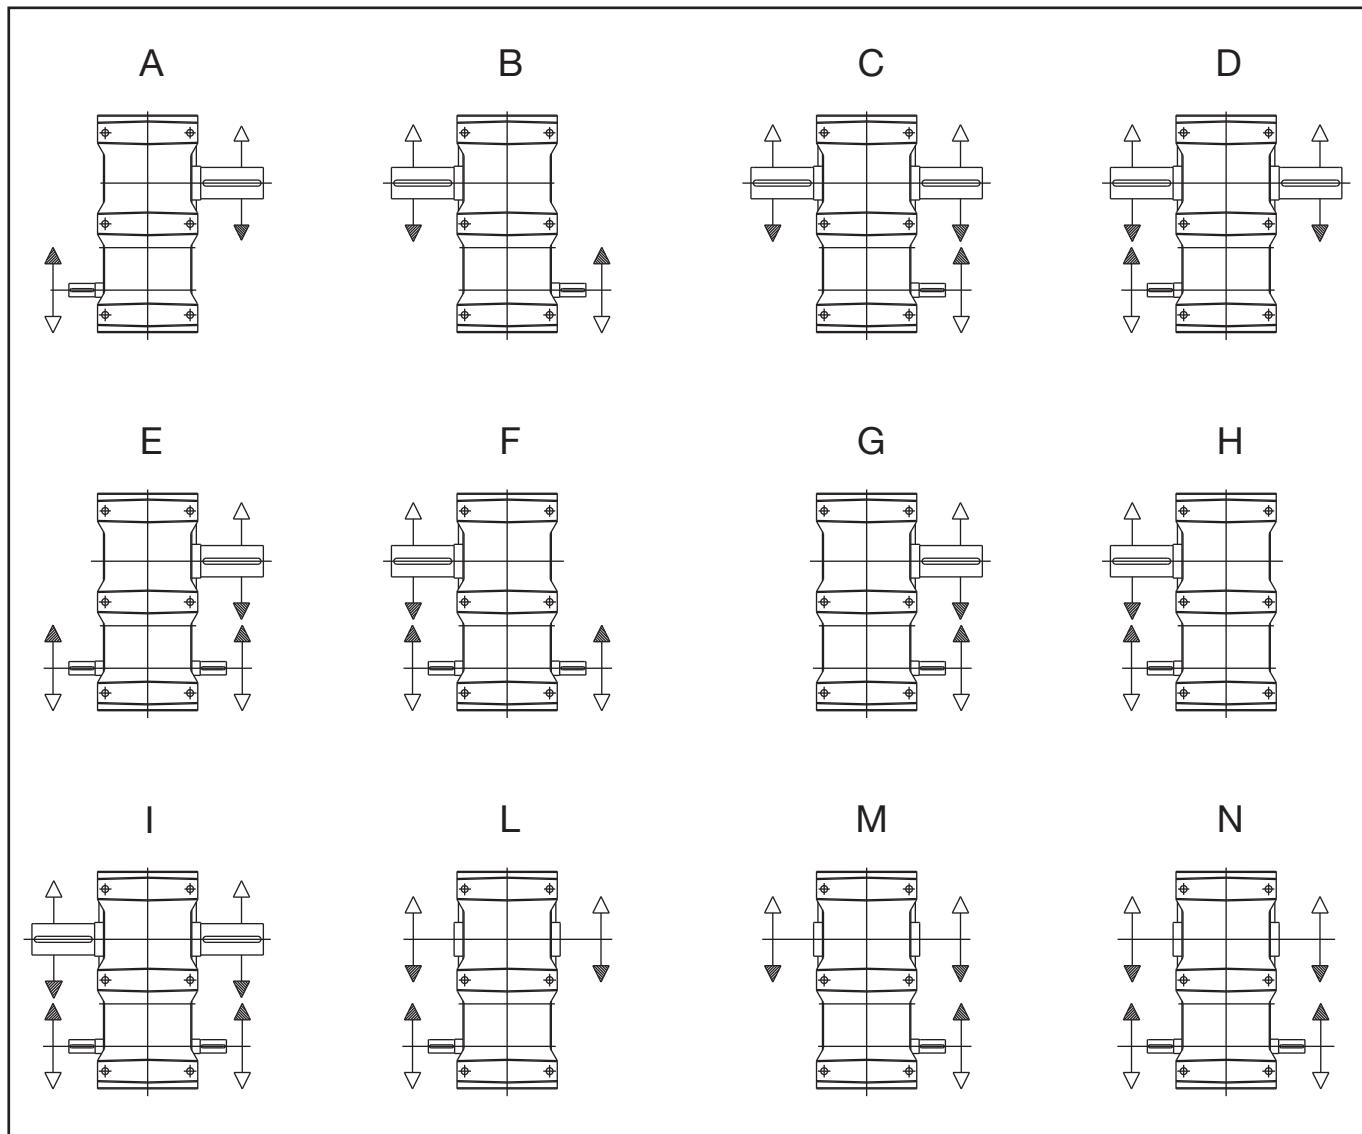

MOUNTING POSITION

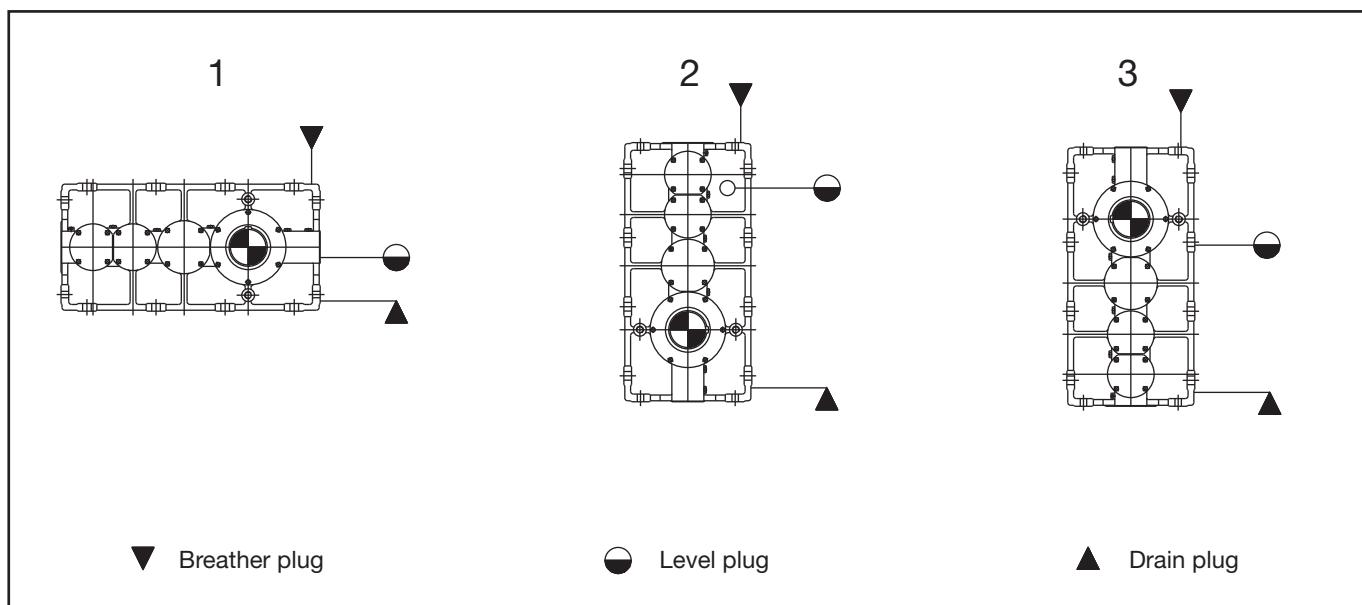


ACTUAL RATIOS

Sizes

| <i>i_N</i> | 13 | 23 | 33 | 43 | 53 | 63 | 73 | 83 | 93 | 103 |
|----------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|
| 8 | 8,021 | 8,357 | 8,263 | 7,995 | 7,942 | 7,865 | 8,021 | 7,9 | 8 | 7,995 |
| 9 | 8,928 | 8,815 | 9,181 | 8,848 | 8,825 | 8,752 | 8,928 | 8,791 | 8,877 | 8,848 |
| 10 | 9,949 | 9,812 | 10,208 | 9,799 | 9,811 | 9,747 | 9,949 | 9,79 | 9,858 | 9,799 |
| 11,2 | 11,106 | 10,934 | 11,362 | 11,499 | 10,921 | 11,487 | 11,106 | 10,918 | 10,962 | 11,499 |
| 12,5 | 12,428 | 12,205 | 12,67 | 12,732 | 12,178 | 12,855 | 12,428 | 12,202 | 12,212 | 12,732 |
| 14 | 13,953 | 13,658 | 14,166 | 14,198 | 13,615 | 13,614 | 13,953 | 13,675 | 13,614 | 14,198 |
| 16 | 15,733 | 16,274 | 15,891 | 15,89 | 16,202 | 16,274 | 15,733 | 16,346 | 16,213 | 15,89 |
| 18 | 17,837 | 18,396 | 17,904 | 17,863 | 18,302 | 18,449 | 17,837 | 18,531 | 18,301 | 17,863 |
| 20 | 20,361 | 19,602 | 20,283 | 20,196 | 19,495 | 19,692 | 20,361 | 19,78 | 19,487 | 20,196 |
| 22,5 | 22,564 | 22,121 | 23,019 | 23,609 | 22,125 | 23,227 | 22,564 | 22,121 | 23,625 | 23,609 |
| 25 | 25,117 | 24,615 | 25,577 | 24,837 | 24,583 | 24,5 | 25,117 | 24,615 | 24,886 | 24,837 |
| 28 | 27,988 | 27,413 | 28,436 | 27,495 | 27,331 | 27,271 | 27,988 | 27,413 | 27,623 | 27,495 |
| 31,5 | 31,243 | 32,308 | 31,651 | 32,087 | 32,117 | 32,099 | 31,243 | 32,308 | 30,692 | 32,087 |
| 35,5 | 34,962 | 36,154 | 35,296 | 35,643 | 35,858 | 35,873 | 34,962 | 36,154 | 36,063 | 35,643 |
| 40 | 39,254 | 40,592 | 39,462 | 39,688 | 40,153 | 40,205 | 39,254 | 40,592 | 40,284 | 39,688 |
| 45 | 44,26 | 45,769 | 44,268 | 44,333 | 45,135 | 45,231 | 44,26 | 45,769 | 45,153 | 44,333 |
| 50 | 50,178 | 48,696 | 49,875 | 49,722 | 50,984 | 51,13 | 50,178 | 48,696 | 50,834 | 49,722 |
| 56 | 57,278 | 55,385 | 56,502 | 56,047 | 54,307 | 54,483 | 57,278 | 55,385 | 57,548 | 56,047 |
| 63 | 61,389 | 63,482 | 64,454 | 63,577 | 61,95 | 62,192 | 61,389 | 63,482 | 65,605 | 63,577 |
| 71 | 71,062 | 73,484 | 69,058 | 72,692 | 71,292 | 71,615 | 71,062 | 73,484 | 70,269 | 72,692 |
| 80 | 83,314 | 79,423 | 79,89 | 78,01 | 82,969 | 77,158 | 83,314 | 79,423 | 81,244 | 78,01 |
| 90 | 90,752 | 93,846 | 93,612 | 90,638 | 89,975 | 90,462 | 90,752 | 93,846 | 87,761 | 90,638 |
| 100 | 99,335 | 102,722 | 101,942 | 98,215 | 97,982 | 98,538 | 99,335 | 102,722 | 103,587 | 98,215 |
| 112 | 109,349 | 113,077 | 111,555 | 116,867 | 107,221 | 107,858 | 109,349 | 113,077 | 113,325 | 116,867 |
| 125 | 121,183 | 125,315 | 122,769 | 128,524 | 130,739 | 131,58 | 121,183 | 125,315 | 124,688 | 128,524 |
| 140 | 135,385 | 140 | 136,023 | 142,301 | 146,025 | 147 | 135,385 | 140 | 138,115 | 142,301 |

MOTORIZED GEAR UNITS

1 Connection with elastic coupling

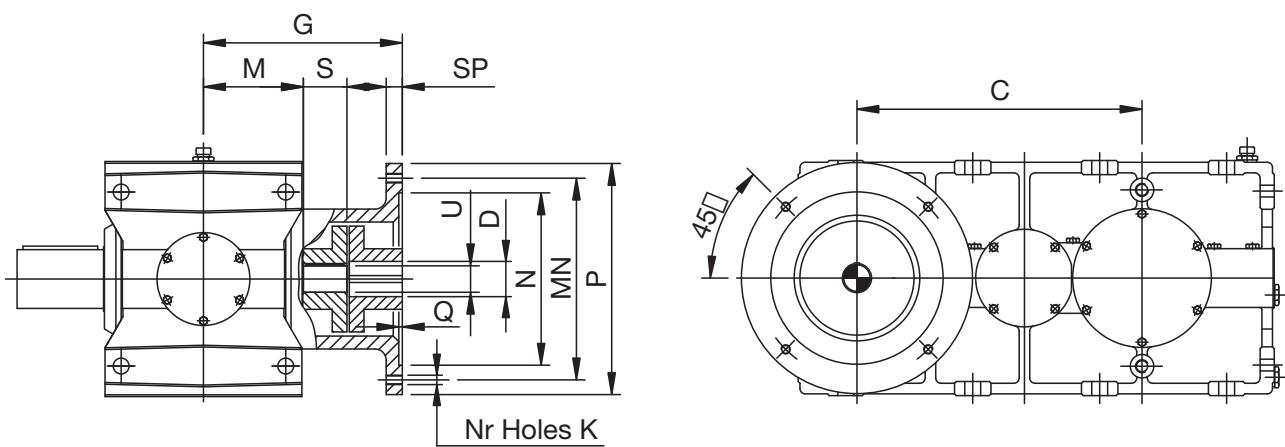

OVERHUNG LOADS

In the case of driving parts, which could generate overhung loads on the shafts of the gear unit itself, being connected at either input and output, it is best to make sure the gear unit is able to withstand such loads.

The table shows the max values of the overhung loads on the high-speed shaft F_{r1} and on the low-speed shaft F_{r2} which are acceptable in the event of the load being applied at centre distance of the shaft end (dimensions U and S of the relevant dimensional tables).

Different cases can occur for which the following indications should be taken into account:

- a) if acting at 0.25 U or S from the gearbox side, multiply such values by 2.
- b) if acting at 0.75 U or S from the gearbox side, multiply such values by 0.67.

In the event of the generated overhung load being below 20% of the values shown on the table, no check need be made.

At the same time as the overhung load, a **thrust load** of 20% of the overhung load is also acceptable.

For higher values, please contact us.

The overhung loads can be calculated approximately, using the following formula:

$$F_r = k \cdot \frac{T}{D}$$

T (Nm) : torque

D (mm) : pitch circle diameter of the keyed component

Where k values are:

1. 2000 for chain drive
2. 2100 for gear drive
3. 3000 for cog belt drive
4. 5000 for V-belt drive

MASS MOMENTS OF INERTIA J_1 (kgm^2)

Sizes

| i_N | 13 | 23 | 33 | 43 | 53 | 63 | 73 | 83 | 93 | 103 |
|-------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|
| 8 | 0,001 | 0,0037 | 0,0043 | 0,0126 | 0,0193 | 0,0302 | 0,055 | 0,0946 | 0,1785 | 0,3149 |
| 9 | 0,001 | 0,0034 | 0,0041 | 0,0116 | 0,0181 | 0,0285 | 0,0518 | 0,0864 | 0,168 | 0,2965 |
| 10 | 0,001 | 0,0032 | 0,0039 | 0,0107 | 0,0169 | 0,0269 | 0,0488 | 0,0845 | 0,158 | 0,2791 |
| 11,2 | 0,001 | 0,0029 | 0,0038 | 0,0099 | 0,0158 | 0,0254 | 0,046 | 0,0798 | 0,1487 | 0,2627 |
| 12,5 | 0,001 | 0,0027 | 0,0036 | 0,0092 | 0,0148 | 0,024 | 0,0434 | 0,0754 | 0,1399 | 0,2473 |
| 14 | 0,001 | 0,0025 | 0,0035 | 0,0085 | 0,0138 | 0,0226 | 0,0409 | 0,0712 | 0,1316 | 0,2328 |
| 16 | 0,0009 | 0,0024 | 0,0033 | 0,0078 | 0,0129 | 0,0214 | 0,0385 | 0,0673 | 0,1238 | 0,2191 |
| 18 | 0,0009 | 0,0022 | 0,0032 | 0,0073 | 0,012 | 0,0202 | 0,0363 | 0,0635 | 0,1165 | 0,2063 |
| 20 | 0,0009 | 0,002 | 0,0031 | 0,0067 | 0,0113 | 0,019 | 0,0342 | 0,06 | 0,1096 | 0,1942 |
| 22,5 | 0,0009 | 0,0019 | 0,0029 | 0,0062 | 0,0105 | 0,018 | 0,0322 | 0,0567 | 0,1031 | 0,1828 |
| 25 | 0,0009 | 0,0017 | 0,0029 | 0,0057 | 0,0098 | 0,017 | 0,0304 | 0,0536 | 0,097 | 0,1721 |
| 28 | 0,0008 | 0,0016 | 0,0028 | 0,0053 | 0,0092 | 0,016 | 0,0286 | 0,0506 | 0,0913 | 0,162 |
| 31,5 | 0,0008 | 0,0015 | 0,0026 | 0,0049 | 0,0086 | 0,0151 | 0,027 | 0,0478 | 0,0859 | 0,1525 |
| 35,5 | 0,0008 | 0,0014 | 0,0025 | 0,0046 | 0,0081 | 0,0143 | 0,0254 | 0,0452 | 0,0808 | 0,1436 |
| 40 | 0,0008 | 0,0013 | 0,0024 | 0,0043 | 0,0076 | 0,0135 | 0,024 | 0,0427 | 0,076 | 0,1352 |
| 45 | 0,0007 | 0,0013 | 0,0023 | 0,004 | 0,0072 | 0,0127 | 0,0226 | 0,0403 | 0,0716 | 0,1273 |
| 50 | 0,0007 | 0,0012 | 0,0021 | 0,0038 | 0,0067 | 0,012 | 0,0213 | 0,0379 | 0,0674 | 0,1199 |
| 56 | 0,0006 | 0,0011 | 0,002 | 0,0036 | 0,0063 | 0,0113 | 0,0201 | 0,0357 | 0,0634 | 0,1128 |
| 63 | 0,0006 | 0,0011 | 0,0019 | 0,0034 | 0,006 | 0,0107 | 0,019 | 0,0337 | 0,0599 | 0,1066 |
| 71 | 0,0006 | 0,001 | 0,0018 | 0,0032 | 0,0057 | 0,0101 | 0,0179 | 0,0319 | 0,0566 | 0,1007 |
| 80 | 0,0005 | 0,001 | 0,0017 | 0,0031 | 0,0054 | 0,0097 | 0,0171 | 0,0305 | 0,0543 | 0,0965 |
| 90 | 0,0005 | 0,0009 | 0,0017 | 0,0029 | 0,0052 | 0,0093 | 0,0165 | 0,0294 | 0,0523 | 0,093 |
| 100 | 0,0005 | 0,0009 | 0,0015 | 0,0029 | 0,0051 | 0,009 | 0,016 | 0,0266 | 0,0508 | 0,0904 |
| 112 | 0,0005 | 0,0009 | 0,0015 | 0,0028 | 0,005 | 0,0088 | 0,0157 | 0,0279 | 0,0496 | 0,0882 |
| 125 | 0,0005 | 0,0009 | 0,0015 | 0,0027 | 0,0048 | 0,0086 | 0,0153 | 0,0272 | 0,0483 | 0,0859 |
| 140 | 0,0005 | 0,0008 | 0,0015 | 0,0026 | 0,0047 | 0,0084 | 0,0149 | 0,0266 | 0,0474 | 0,0842 |

The values shown refer to the high-speed shaft of the gear unit, in the version with a single protrusion. The moment of inertia referring to low-speed axis can be obtained from the following formula:

$$J_2 = J_1 \bullet i_r^2$$

i_r : actual ratio

LUBRICATION

ISO & AGMA Viscosity grade

| Speed n_2 (min $^{-1}$) | Standard | Room temperature range (°C) | | |
|-------------------------------|------------|-----------------------------|---------------|-----------------|
| | | from -10 to -15 | from 0 to +30 | from +10 to +50 |
| Under 100 | ISO - AGMA | VG 68 2 EP | VG 150 4 EP | VG 220 5 EP |
| Over 100 | ISO - AGMA | VG 100 3 EP | VG 220 5 EP | VG 320 6 EP |

Recommended Mineral Lubricants

| ISO viscosity at 40°C | BP <i>Energol</i> | ESSO <i>Spartan</i> | MOBIL <i>Mobilgear</i> | SHELL <i>Omala</i> | TEXACO <i>Meropa</i> | TOTAL <i>Carter</i> | AGIP <i>Blasia</i> |
|--------------------------|----------------------|------------------------|---------------------------|-----------------------|-------------------------|------------------------|-----------------------|
| VG 320 | GR-XP 320 | EP 320 | 632 | 320 | 320 | EP 320 | 320 |
| VG 220 | GR-XP 220 | EP 220 | 630 | 220 | 220 | EP 220 | 220 |
| VG 150 | GR-XP 150 | EP 150 | 629 | 150 | 150 | EP 150 | 150 |
| VG 100 | GR-XP 100 | EP 100 | 627 | 100 | 100 | EP 100 | 100 |
| VG 68 | GR-XP 68 | EP 68 | 626 | 68 | 68 | EP 68 | 68 |

Recommended Synthetic Lubricants

| ISO viscosity at 40°C | BP <i>Enersyn</i> | CASTROL <i>Tribol</i> | MOBIL <i>SHC</i> | KLUEBER <i>EG4</i> |
|--------------------------|----------------------|--------------------------|---------------------|-----------------------|
| VG 320 | EPX 320 | 1510/320 | 632 | 320 |
| VG 220 | EPX 220 | 1510/220 | 630 | 220 |
| VG 150 | HTX 150 | 1510/150 | 629 | 150 |
| VG 68 | | | 626 | |







Mineral oil: max running temperature 90°C

Synthetic oil: max running temperature 100°C (110°C for short running).

Do not mix up synthetic oil of different brands.

Oil change interval (h)

| TYPE | Oil temperature | | |
|-----------|-----------------|-------|-------|
| | 65°C | 80°C | 90°C |
| Mineral | 8000 | 4000 | 2000 |
| Synthetic | 20000 | 15000 | 10000 |

| SELECTION FORM OF GEAR UNIT FOR LIFTING | |
|--|--|
| REFERENCES | Customer: _____ Date: _____ Contact: _____ Tel.: _____ _____ e-mail: _____ |
| FITTING CHARACTERISTICS | <p>Drum fitting diagram: _____</p> <p>AS1: splined shaft and broached flange AS4: hollow shaft</p>   <p>AS2: projecting drum on low-speed shaft AS5: belt drive on low-speed shaft</p>   <p>x max [mm]= _____</p> <p>Ø driven wheel [mm]= _____</p> <p>Ø driving wheel [mm]= _____</p> <p>AS3: projecting drum + restraint AS6: external gear drive</p>   <p>L [mm]= _____</p> <p>Ø driven wheel [mm]= _____</p> <p>x max [mm]= _____</p> <p>Ø driving wheel [mm]= _____</p> <p>Class FEM (M_): _____ Duration (T_): _____ Load condition (L_): _____</p> <p>Weight to be lifted (including drum weight) [kg] _____</p> <p>Drum diameter [mm] _____</p> <p>Lifting speed [m/mm] _____</p> <p>Block external reduction (if fitted) Reduction ratio _____</p> |
| GEAR UNIT CHARACTERISTICS | Input side (male/double extended shaft – motor flange – motor flange and elastic coupling): Output side (male/splined/double extended/hollow/hollow shaft with shrink disc – output flange): Special seals (double/in Viton/labyrinth): Others: |
| NOTES | DOCUMENTATION: NOTES: |

STATE OF SUPPLY

NOTE: INSPECT THE CONTENTS OF THE INSTALLATION AND MAINTENANCE MANUAL PROVIDED WITH THE GEAR UNITS.

On receipt of goods, check these correspond to those ordered and that no damage has been caused during transport.

Avoid using even only slightly damaged gear units.

The gear units are coated on the outside with epoxy primer and synthetic enamel blue RAL 5017, which permit further finishes with synthetic paints. If the gear units are used in aggressive environments, ask for adequate painting to be provided.

The shaft ends, hollow shafts, centring and machined connecting surfaces are protected with anti-oxidation grease.

The gear units are supplied without lubricant, unless otherwise contractually agreed.

If the gear unit features a backstop device or cooling fan, an arrow near the low-speed shaft indicates the direction of free rotation.

STORAGE

The gear units must be stored in dry, clean and vibration-free environments. To avoid damaging bearings and seals have the gears perform one complete revolution by means of the high-speed shaft every six months. For storage periods of over one year, the oil filling cap must be replaced with another without breather valve and the gear unit must be completely filled with oil. Every six months, change the grease in the seals and the protective substance on the machined parts.

The gear unit must be adequately painted if stored in an aggressive environment. Also protect the rotating parts and machined surfaces with water-repellent and anti-oxidising grease. In the case of damp environments or where temperature fluctuations are strong, hygroscopic tablets should be used and all the above inspections made more frequently. Protect the gear unit as best as possible from sunrays and weather conditions. In the latter case, protection is mandatory.

If the gear unit is not used for long periods of time, all the machined parts should be protected. Check and lubricate the various connections, change the old oil with new oil of the same type.

In the case of water-oil heat exchangers, the water supply pipes must be removed and cleaned with compressed air, to remove any water inside the pipes. If the exchanger is of the type that can be inspected, it is best to dismantle the pipe nest.

INSTALLATION

Make sure the structure to which the gear unit is fastened is flat, level and suitably sized to ensure stability and the absence of vibrations. To fasten, use the holes on the 4 sides of the casing and screws of suitable length. For other fastening requirements, contact our Technical Dept.

To lift the gear unit, use the fastening through holes on the casing and try and distribute weight properly. Never lift the gear unit by means of the shaft ends or flanged motors or any accessories fitted to the gear unit.

If cooling fans are fitted, the gear unit must be placed in such a position as to ensure a proper flow of air.

If the gear unit-machine fastening is by means of coupling flanges, it is best to use locking adhesives for the fastening screws.

If backstop devices or cooling fans are fitted, make sure, with the gear unit disconnected, that the direction of motor rotation is correct. If it is not, switch over the motor voltage. Idle start-ups must be gentle with low breakaway currents and reduced stress. If lengthy overloads, knocks or blockage hazards are expected, fit safety hydraulic couplings, control units or other similar devices.



REGGIANA RIDUTTORI s.r.l.

Via Martiri di Marzabotto, 7 - 42020 S. Polo d'Enza (RE) Italy
Tel. +39 0522 259111 • Fax +39 0522 874321
e-mail: info@reggianariduttori.com • www.reggianariduttori.com